

3500 FRONT UNLOAD


HYDRAULIC WET KIT OR PTO PROVIDED BY CUSTOMER

TRUCK HYDRAULIC DRIVE

2000 PSI MAX.
 HYDRAULIC PUMP 15-17 GPM
 30 GALLON RESERVOIR
 1/2" NPT FRONT HYDRAULIC CONNECTIONS
 RELIEF VALVE SETTING 1750 PSI


TRUCK PTO DRIVE

60-80% OF ENGINE SPEED
 #60 ROLLER CHAIN RECOMMENDED
 JACK SHAFT-60B16 SPROCKET
 45/4600 DRIVE 60B30 1-1/4" BORE, 1/4" KEYWAY

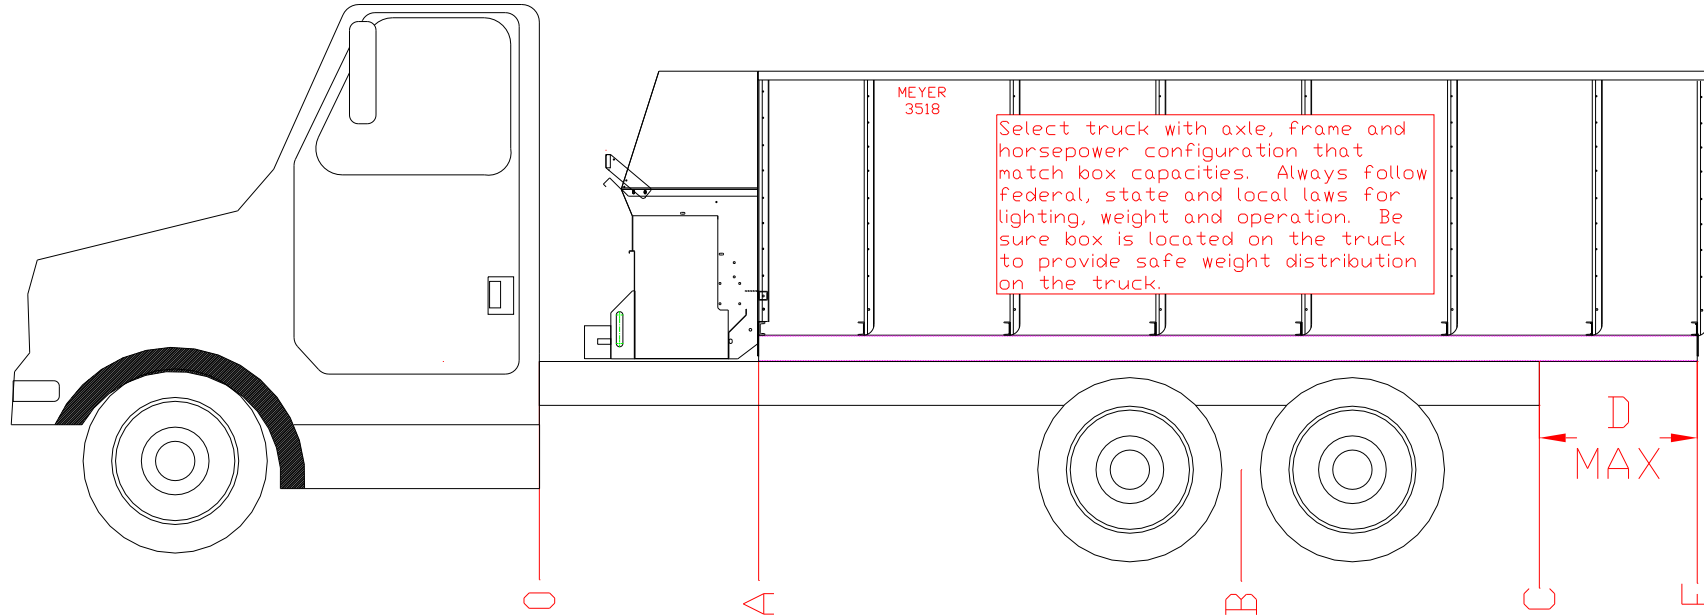

DIMENSION B-CENTER OF AXLE OR TRUNION

SIZE	A	B	C	D	E
3516	50"	148"	204"	38"	242"
3518	50"	160"	228"	38"	266"

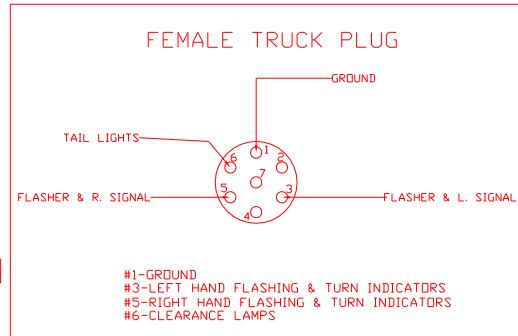

SUPPLY A 7-PIN PLUG OFF THE REAR OF CAB FOR LIGHT HOOK-UP TO IMPLEMENT LOCATE CENTRALLY BEHIND CAB. ORDER 56-0005 CORD ASSEMBLY, 7-PIN TO 4-PIN

TAILLIGHT CONVERTER
 DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER (MEYER PART #56-0028). CONVERTER ALLOWS SIGNAL LIGHTS AND BRAKE LIGHTS TO OPERATE ACCORDING TO DOT LIGHTING.

TOLERANCE: +DR- 1/32 UNLESS OTHERWISE SPECIFIED		MEYER MFG. CORP.	
FINISH		TITLE FORAGE BOX TRUCK MOUNT DIMENSIONS	
MATERIAL:	SCALE	DWG. BY JAA	APPROVED BY
REV. DATE:	DESCRIPTION	DATE 11-8-06	DWG. NO. 3500 TRUCK MOUNT