

# 3500 FRONT UNLOAD


HYDRAULIC WET KIT OR PTO PROVIDED BY CUSTOMER

TRUCK HYDRAULIC DRIVE

2000 PSI MAX.  
RELIEF VALVE INSTALLED, SET AT 2000 PSI  
HYDRAULIC PUMP 15-17 GPM  
30 GALLON RESERVOIR WITH OIL  
1/2" NPT FRONT HYDRAULIC CONNECTIONS


TRUCK PTO DRIVE

60-80% OF ENGINE SPEED  
#60 ROLLER CHAIN RECOMMENDED  
JACK SHAFT-60B16 SPROCKET  
45/4600 DRIVE 60B30 1-1/4" BORE, 1/4" KEYWAY

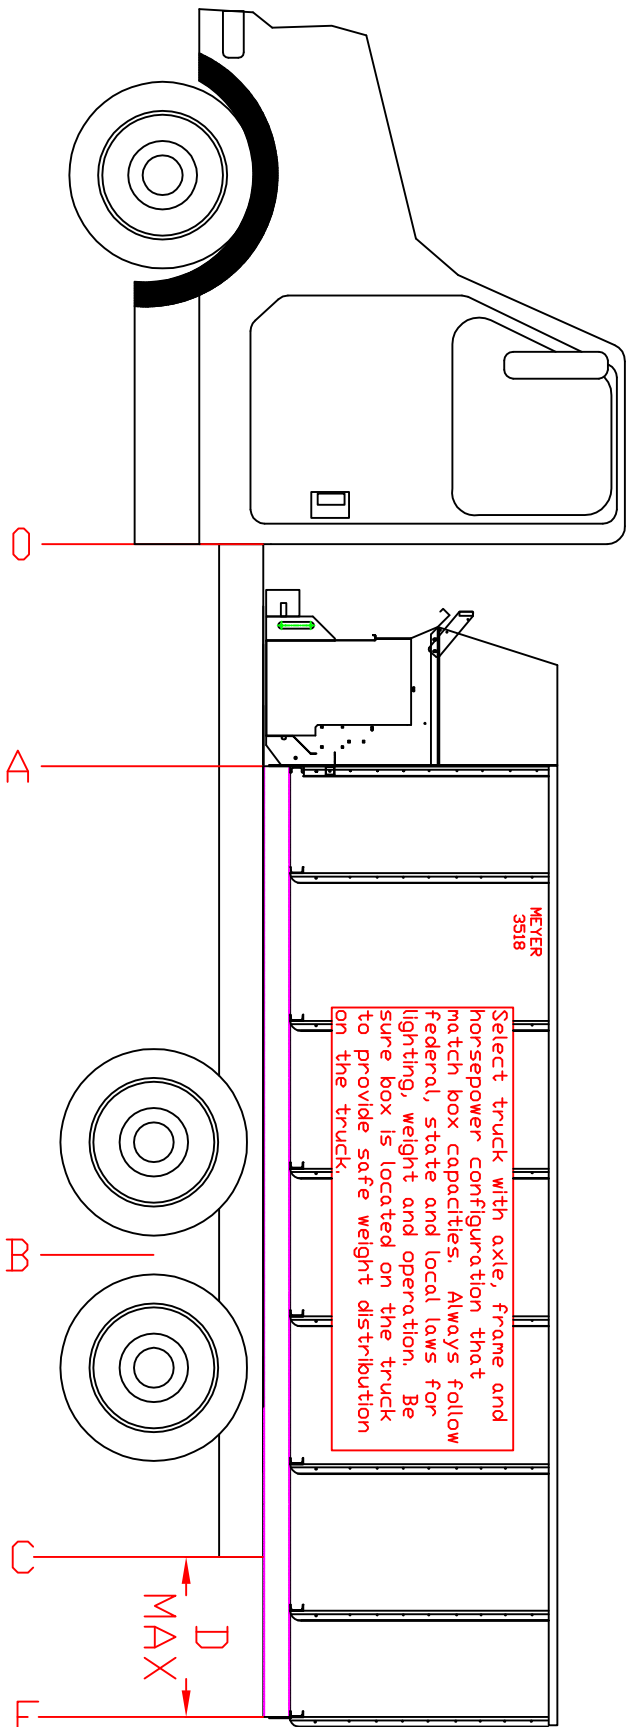

Select truck with axle, frame and horsepower configuration that match box capacities. Always follow federal, state and local laws for lighting, weight and operation. Be sure box is located on the truck to provide safe weight distribution on the truck.


**TAILLIGHT CONVERTER**  
DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER (MEYER PART #56-0028). CONVERTER ALLOWS SIGNAL LIGHTS AND BRAKE LIGHTS TO OPERATE ACCORDING TO DOT LIGHTING.

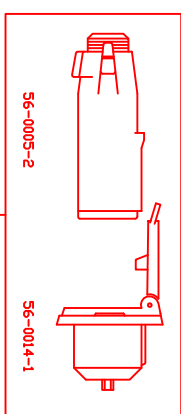

SUPPLY A 7-PIN MALE & FEMALE PLUG OFF THE REAR OF CAB FOR LIGHT HOOK-UP TO IMPLEMENT, LOCATED CENTRALLY BEHIND CAB. FROM MEYER ORDER 56-0005-2 & 56-0014-1.

DIMENSION B-CENTER OF AXLE OR TRUNION

| SIZE | A   | B    | C    | D   | E    |
|------|-----|------|------|-----|------|
| 3516 | 50" | 148" | 204" | 38" | 242" |
| 3518 | 50" | 160" | 228" | 38" | 266" |

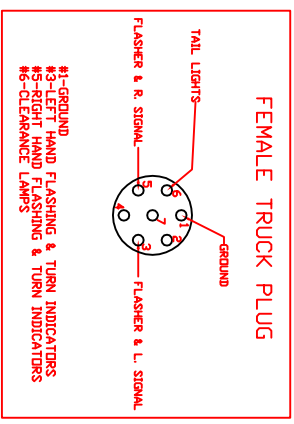

|                                      |   |
|--------------------------------------|---|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | MEYER MFG. CORP.                        |
| FINISH                               | TITLE FORAGE BOX TRUCK MOUNT DIMENSIONS |
| SCALE                                | DWG. BY JAA APPROVED BY                 |
| DATE 6/23/2009                       | DWG. NO. 3500 TRUCK MOUNT               |