


# 4200/6220 FRONT/REAR UNLOAD HYDRAULIC WET KIT OR PTO PROVIDED BY CUSTOMER

## TRUCK HYDRAULIC DRIVE

3000 PSI MAX.  
RELIEF VALVE INSTALLED, SET AT 3000 PSI  
HYDRAULIC PUMP-25 GPM  
30 GALLON RESERVOIR WITH OIL  
3/4" NPT REAR HYDRAULIC CONNECTIONS  
3/4" NPT FRONT HYDRAULIC CONNECTIONS  
SELECTOR VALVE NEEDED TO SWITCH  
FROM FRONT TO REAR DRIVE

## TRUCK PTO DRIVE


60-80% OF ENGINE SPEED  
#60 ROLLER CHAIN RECOMMENDED  
JACK SHAFT-60B16 SPROCKET  
4200 DRIVE 60B32 1-1/4" BORE, 1/4" KEYWAY

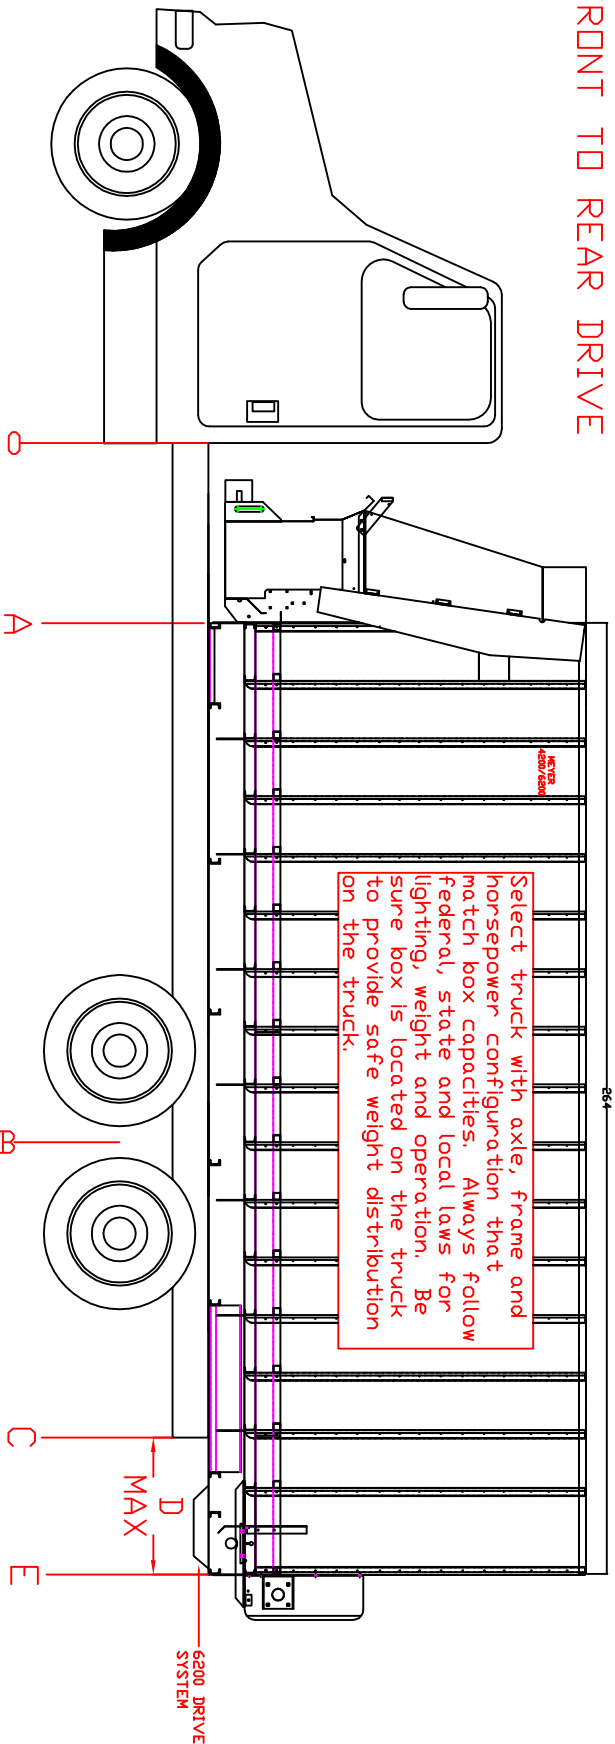


Select truck with axle, frame and horsepower configuration that match box capacities. Always follow federal, state and local laws for lighting, weight and operation. Be sure box is located on the truck to provide safe weight distribution on the truck.

**TAILLIGHT CONVERTER**  
DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER (MEYER PART #56-0028). CONVERTER ALLOWS SIGNAL LIGHTS AND BRAKE LIGHTS TO OPERATE ACCORDING TO DOT LIGHTING.

FEMALE TRUCK PLUG



#1-GROUND  
#2-LEFT HAND FLASHING & TURN INDICATORS  
#3-RIGHT HAND FLASHING & TURN INDICATORS  
#4-CLERANCE LAMP



SUPPLY A 7-PIN MALE & FEMALE PLUG OFF THE REAR OF CAB FOR LIGHT HOOK-UP TO IMPLEMENT, LOCATED CENTRALLY BEHIND CAB. FROM MEYER ORDER 56-0005-2 & 56-0014-1.

SIZE	A	B	C	D	E
4216	50"	158"	204"	38"	242"
4218	50"	170"	228"	38"	266"
4220/6220	50"	182"	252"	38"	290"
4222/6222	50"	194"	276"	38"	314"
6224	50"	206"	300"	38"	338"

TOLERANCE: +OR- 1/32 UNLESS OTHERWISE SPECIFIED	MEYER MFG. CORP.
FINISH	TITLE FORAGE BOX TRUCK MOUNT DIMENSIONS
SCALE	DWG. BY JAA APPROVED BY
DATE 6/23/2009	DWG. NO. 4200 6200 TRUCK MOUNT BOX